




# PROPOSED ONEIDA COUNTY HIGHWAY FACILITY RELOCATION

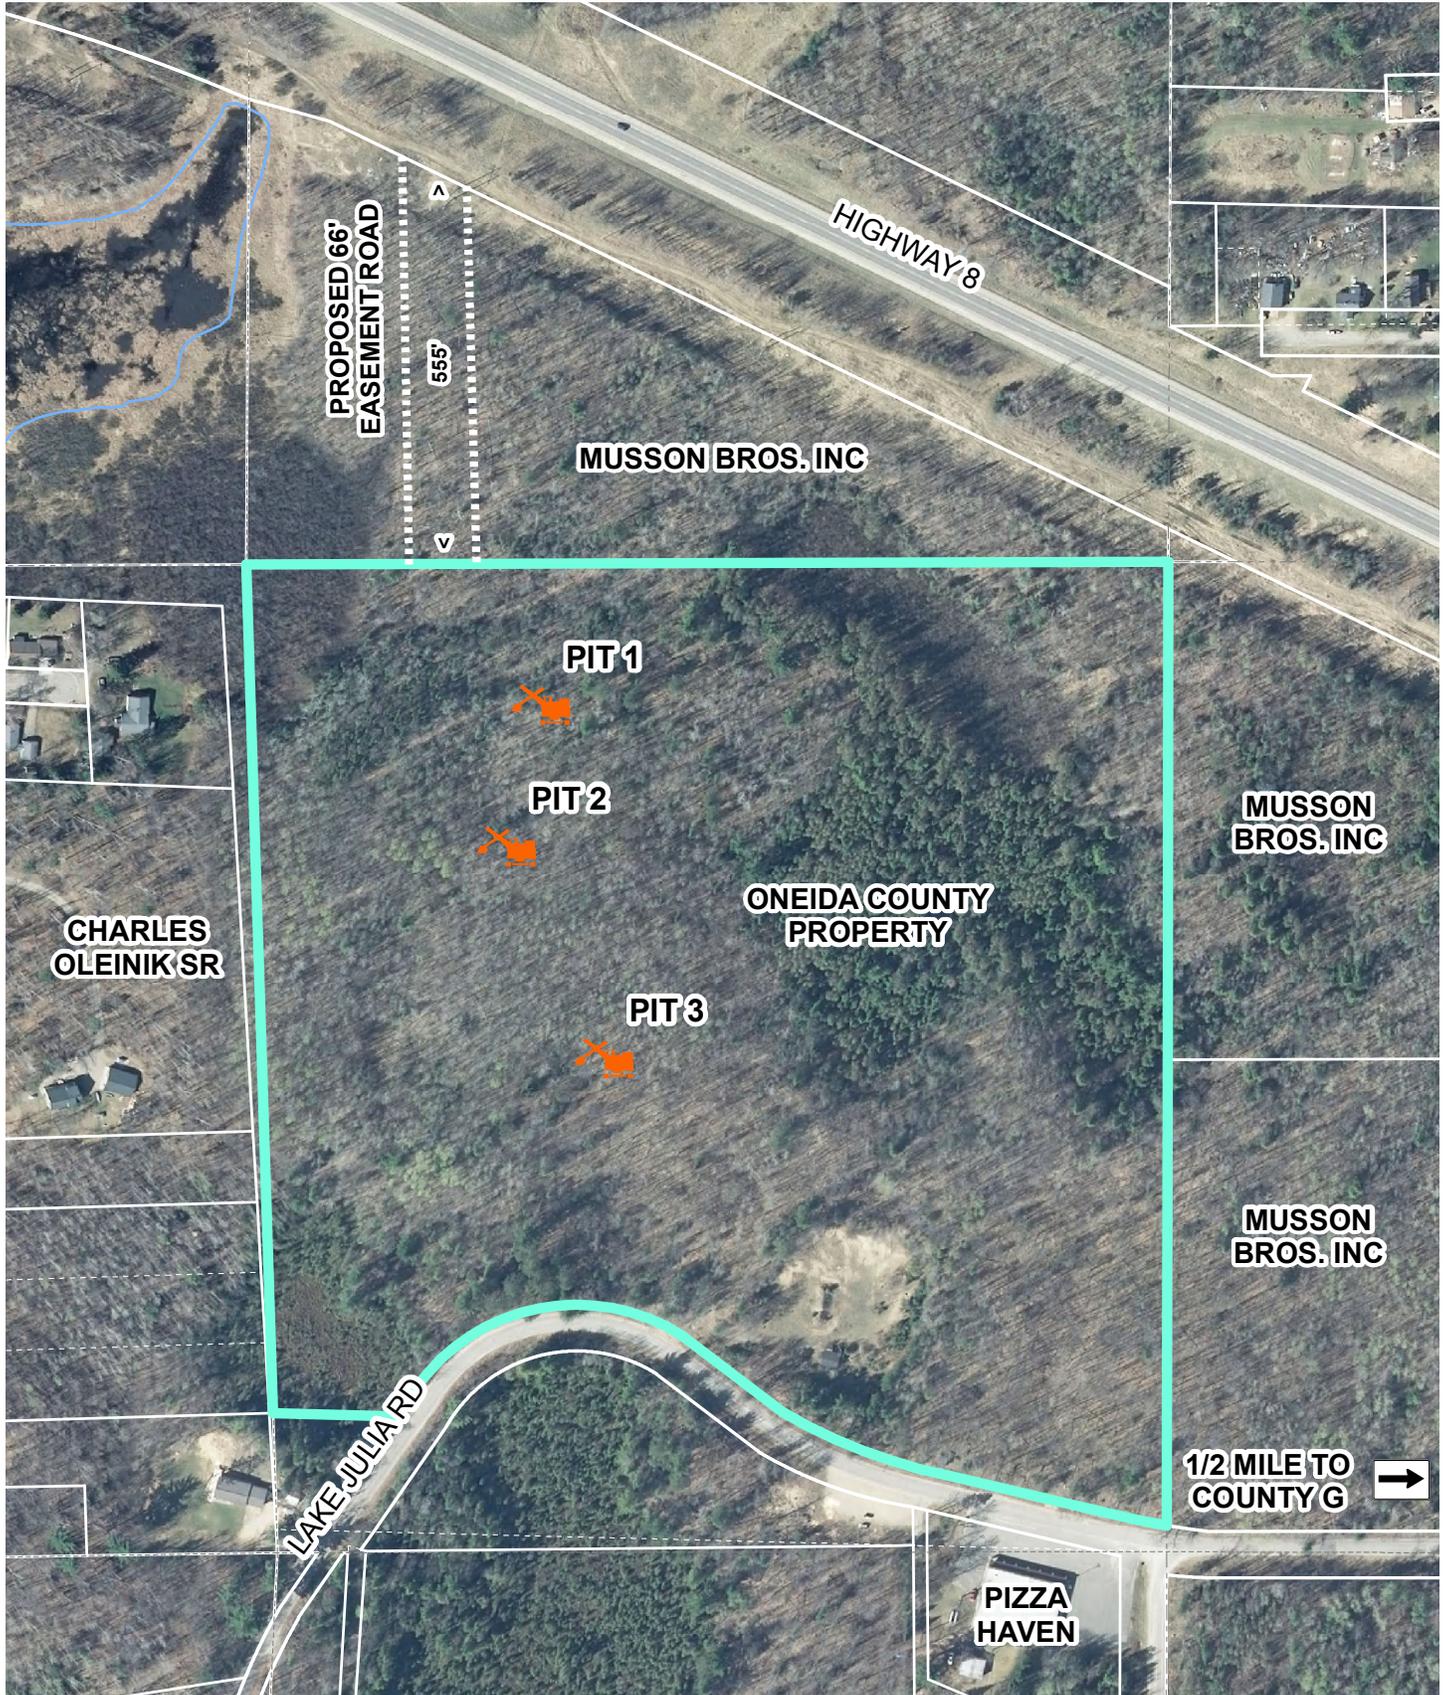

**Pit 1: Northern pit**

Depth of pit approx. 15' consisted of mostly sand and gravelly sand throughout profile, minimal coarse fragments observed several small boulders less than 24" in size. Elevation = 1572.25'



**Pit 2: Middle pit**

Depth of pit approx. 15' consisted mostly of sand, loamy sand, sandy loam, and gravelly sand. Noted several larger boulders throughout profile 24"-36" in size. Elevation = 1576.83'



**Pit 3: Southern pit**

Depth of pit approx. 15' consisted mostly of sand, loamy sand and gravelly sand. Minimal boulders observed throughout profile. Elevation = 1579.17'

