Oneida County Forest
8 Chain Hardwood

Compartment / Stand 91 / 2
Harvest Area 115 acres Marked Thinning
Legal Desc. T36N R4E Sec. 17 SWSW, Sec. 19 E1/2NE, NESE , Sec. 20 NW1/4, N1/2SW

Tract # 2-17
Town of Lynne
Contract No.:_____
Contractor: _____
Date Sold: _____
Date Completed:_____
Contract Length: 2 years

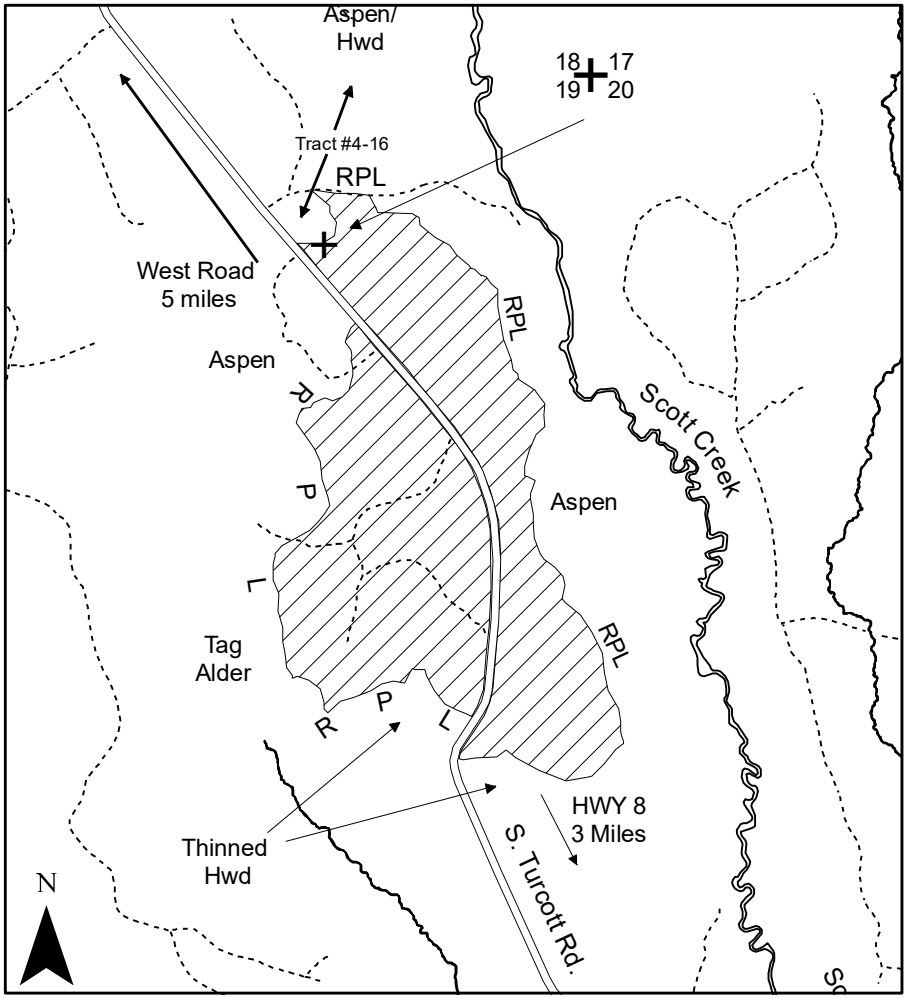

1 inch = 1/4 mile

4" Top	Est. Volume	Min. Bid
Aspen	130 Tons (60 cd)	$9.40/Ton
Basswood	400 Tons (207 cd)	$2.30/Ton
*MX Hardwood	1310 Tons (535 cd)	$9.40/Ton
Balsam Fir	10 Tons (5 Cd)	$3.90/Ton

*MX Hardwood 4" and whole tree contains approximately 45% Sugar Maple, 40% Red Maple, 15% Ash

Whole Tree	Est. Volume	Min. Bid
Aspen	160 Tons (70 cd)	$7.64/Ton
Basswood	457 Tons (237 cd)	$2.01/Ton
*MX Hardwood	1755Tons (716 cd)	$7.02/Ton
Balsam Fir	10 Tons (5 Cd)	$3.90/Ton

Sawlogs	Est. Volume	Min. Bid
Sugar Maple	22 MBF	$245.00/MBF
Basswood	77 MBF	$122.50/MBF
**MXHardwood	41 MBF	$147.00/MBF

**MX Hardwood sawtimber contains approximately 80% White Ash, 17% Red Maple and 3% Black Ash

Legend

- Marked Thinning Area
- RPL Red Paint Line
- Old Logging Road / Skid Trail
- Town Road
- Section Corner
- Stream

1. In the harvest area, harvest all aspen, ironwood and balsam fir >1" DBH. Also harvest all trees marked with orange paint leaving orange visible on the stump. As much musclewood as possible should be cut or run down.

Utilization on all species is a 100” stick to a 4” top or whole tree. If harvesting whole tree, every 10th tree top above the 4” diameter must be left evenly scattered in the harvest area. Any den or nest trees shall be left uncut. Standing dead trees are not to be cut unless they pose a safety hazard. Damage to existing hardwood regeneration must be minimized. If damage to regeneration is deemed excessive by the County, additional regulations may be imposed (no dangle head processors, no hotsaw operations).

2. Dry or frozen ground conditions will be required for harvesting and hauling activities. Harvesting/skidding is limited to July 15 through spring breakup. Additional time restrictions may be imposed if excessive rutting occurs in the woods or on the roads or if excessive damage to the residual trees occurs. If, in the opinion of the County, excessive damage to the residual stand cannot be avoided by the Contractor, additional harvesting restrictions will be imposed or the Contract may be cancelled.

3. No decking or skidding is permitted on S. Turcott Rd or within its ditches without permission from the Town of Lynne. All landings and roads must have approval of the County prior to construction. Following completion of the sale, all trails and landings will be returned to their original condition or better. All access roads will be bermed off or blocked with boulders at the completion of each harvest season and at completion of the sale. Bond money will not be returned until all road work is completed.

4. No equipment or slash is allowed in the wetland areas adjacent to the sale. Equipment may not be operated within 15 feet of any wetland unless ground is dry or frozen.

5. Slash must be pulled back a minimum of 25' from South Turcott Road and shall be cut to within 2' of the ground in this area. No other slash treatment is needed outside the 25' road zone.

6. Stump height shall not exceed 10” within the entire sale area.

7. All items listed in the Oneida County Timber Sale Contract apply. All applicable BMP’s will be followed. Sale Est. AJ/PF/MO 11/2016