Oneida County Forest
Far Northwest Re-Sale

Compartment / Stand 100/1
Harvest Area 86 Acres
Legal Desc. T37N R4E
Sec. 6 SWNW, SW1/4, SWSE
Sec. 7 NWNW

Approximate Sale Location ★

Tract # 18-18
Town of Lynne
Contract No.:_____
Contractor: _____
Date Sold: _____
Date Completed:_____
Contract Length: 2 years

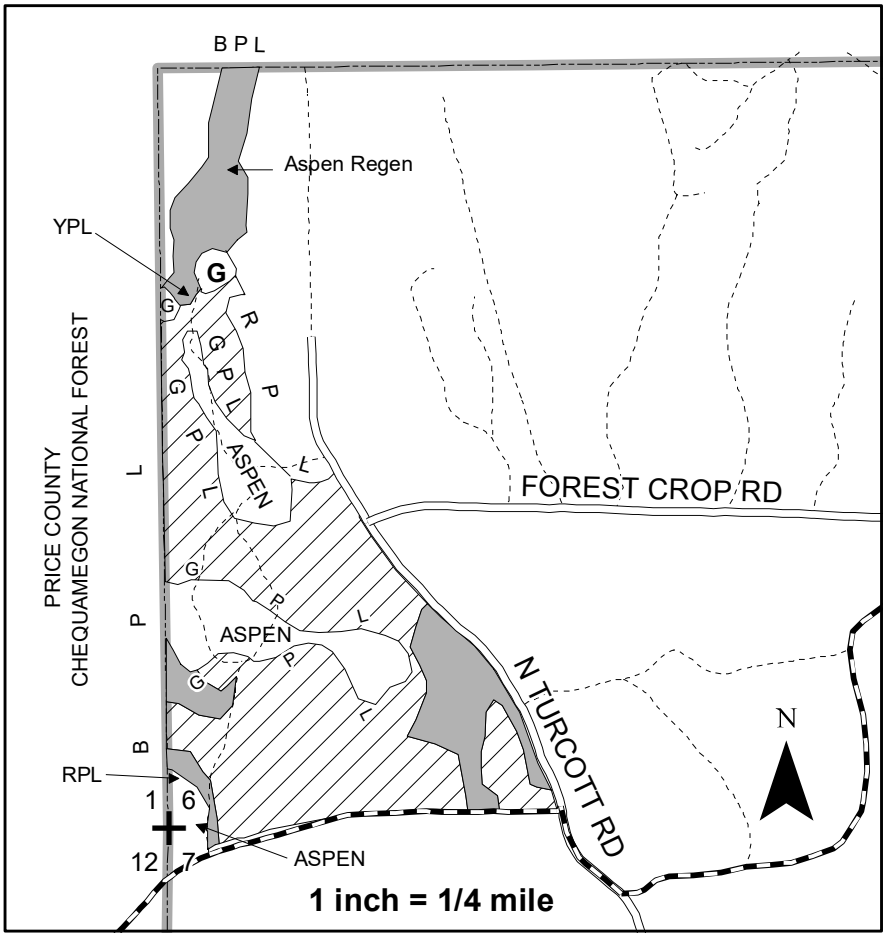

4" Top	Est. Volume	Min. Bid
Aspen	155 Tons (69 cd)	$11.40/Ton
*MX Hardwood	1785 Tons (729 cd)	$11.50/Ton
Basswood	122 T (63 cd)	$4.60/Ton

Whole Tree	Est. Volume	Min. Bid
Aspen	210 Tons (93 cd)	$8.41/Ton
*MX Hardwood	2660 Tons (1086 cd)	$7.72/Ton
Basswood	160 T (83 cd)	$3.45/Ton

LOGS		
Mx Hwd	29 mbf	$143.00/mbf
Basswood	24 mbf	$131.00/mbf

Legend

- Marked Hardwood Area
- Previously Harvested Areas
- Snowmobile Trail
- Survey Corner
- G Grass Opening

YPL Yellow Paint Line
RPL Red Paint Line
BPL Blue Paint Line
GPL Green Paint Line

Additional Regulations:

1. In the **Marked Hardwood Area,** harvest all aspen 10" or larger and all ironwood 1" or larger and all trees marked with orange paint leaving orange visible on the stump. Damage to hardwood regeneration must be minimized. Trees should not be felled into regen areas if possible. If damage to the regeneration becomes excessive, in the opinion of the County, additional restrictions (no hot saw, fixed head harvester only) may be imposed or the contract may be cancelled.
Utilization on all species is 100" stick to a 4" top or whole tree. If harvesting whole tree, 1 in 10 tops above the standard 4" shall be left scattered throughout the sale. No whole tree skidding. Trees must be topped where they are felled.
Any den/nest trees shall be left intact. Standing dead trees are to be left unless they pose a hazard to logging operations.

2. Logging activities are limited to the dates from July 15 through the following spring breakup and only when the ground is dry or frozen enough to prevent rutting. Additional time restrictions may be imposed if excessive rutting or damage to residual trees occurs. If rutting or damage to residual cannot be avoided by the contractor, the contract will be cancelled.

3. Any new trails, landings or turn-arounds must have approval of the County prior to construction. All trails are to be levelled at the end of each harvest season and must be left in as good or better condition at the end of the sale. Access roads off the snowmobile trail and off N Turcott Rd are to be closed with berms or rocks at the end of the sale. Bond money will not be returned until all road work is complete.

4. The snowmobile trail must be kept open, snow covered and in a safe useable condition at all times while snowmobile trails are open. Caution signs must be placed on the snowmobile trail on both the east and west ends of the sale.

5. No equipment is allowed in any wetland within or adjcent to the sale unless the ground is frozen to prevent rutting. No slash is be left in any wetland.

6. All slash is to be pulled back 25' from N. Turcott Rd and lopped and scattered to no more than 2' high in that zone.

7. No skidding or decking on N Turcott Rd without permission of the Town of Lynne.

8. All applicable BMPs must be followed on all aspects of the sale.

9. All Items of the Timber Sale Contract also apply.